


MAGIGLIDE



Bi-pass sliding closet door

Installation Instructions


1. Measure the door opening and trim the pre-cut metal track for an exact fit.
2. LEVEL THE TRACK before fastening. Track must be level for doors to operate properly. Set track at least 1/2" back from face of wall before anchoring to ceiling or header with suitable fasteners (supplied by others).
3. With doors lying flat, position the Adjustable Hanger Brackets to the back side of the doors 1-1/4" from each edge. (2 per door panel). Lightly fasten the Hanger Bracket to door with (2) #8 X 5/8" Phillips - in the elongated screw slot. DO NOT install Lock Screws in the outer holes at this time.

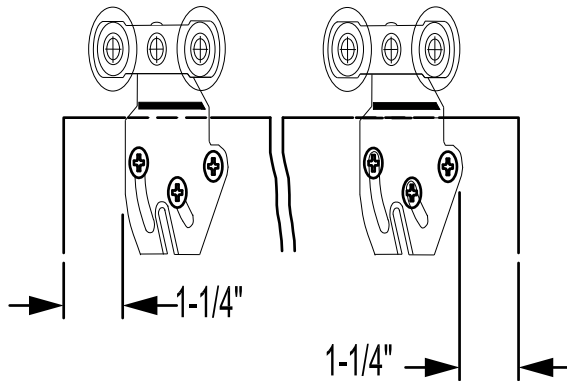

4. Hang rear door panels first. Tilt bottom of panel outward into the room and place Hanger Bracket Rollers into the rear Track Roller Guide. Repeat the same process for the front door panels, using the front Track Roller Guide.

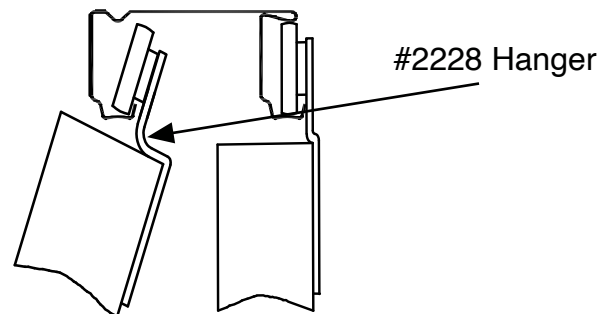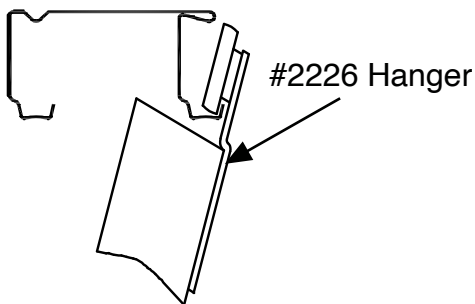


5. Position Floor Guide # 116 parallel to and directly below door panels and Top track. Before fastening permanently to floor, check the plumb of the doors hanging from the tracks, when in both open and closed positions. Doors will overlap by 1/2" when closed.

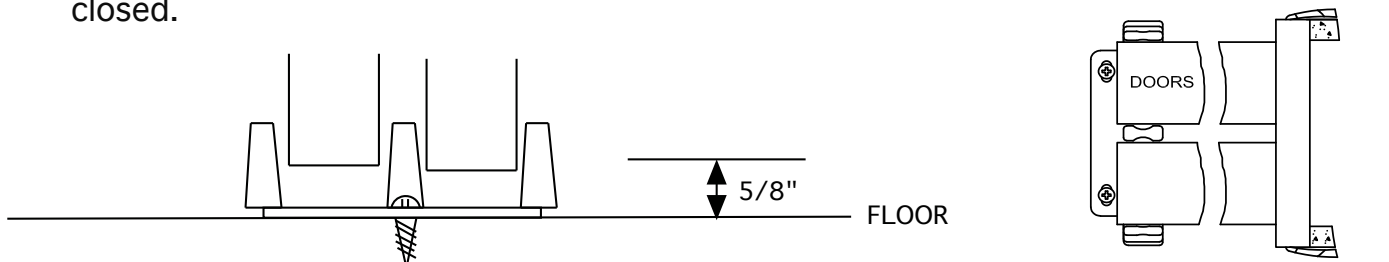


General Precaution: To prevent screws from stripping out of particleboard, never over-torque!


6. Align door panels for correct vertical positioning and leveling. When Door is aligned, tighten the adjustment screws and install Lock Screws in the outer holes at this time using a #8 X 5/8" screw inserted through the remaining round hole in Bracket.

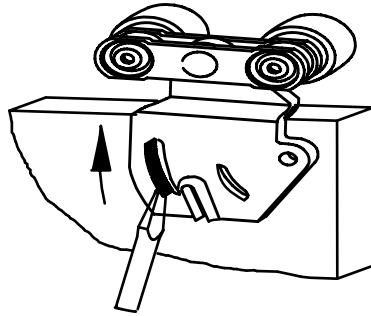

7. Mount the rubber-tipped Door Stop on the back side of the FRONT door panel, 4" in from the door opening edge and directly above the Door Pull.

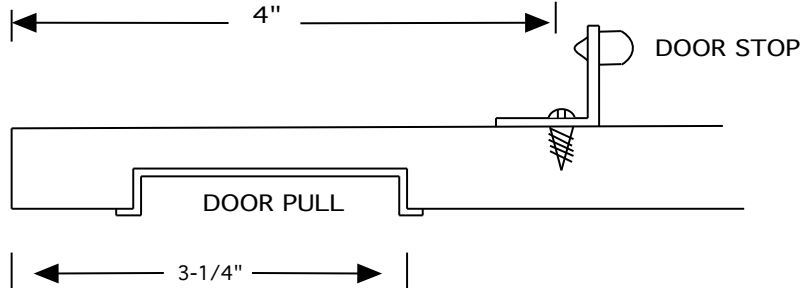



7. Install the #2165 Track Stop on backside of track on 3 panel openings to the right of the center door. On 4 panel openings attach the track stops on backside of the track in the center of the opening.

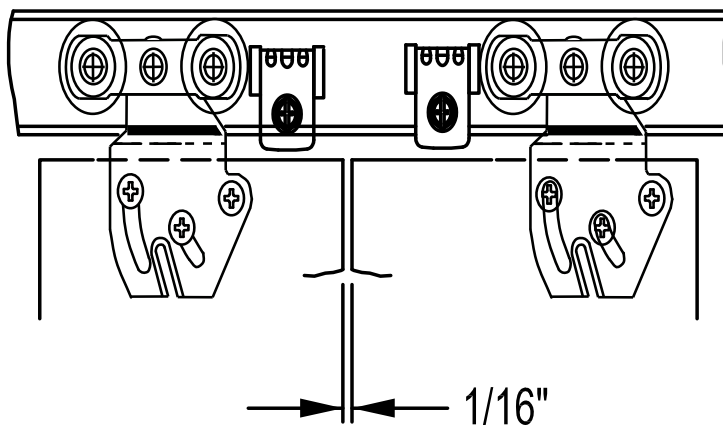


These installation instructions are provided as a guide to the proper installation of the MAGIGLIDE bi-pass closet door system. Failure to follow tolerances detailed and explicit directions for activating locking mechanisms could void the manufacturer's warranty.




MAGIGLIDE bypass closets using Johnson hardware

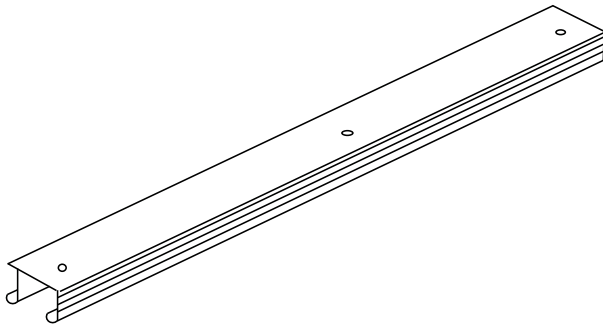


2200 ALUMINUM TRACK

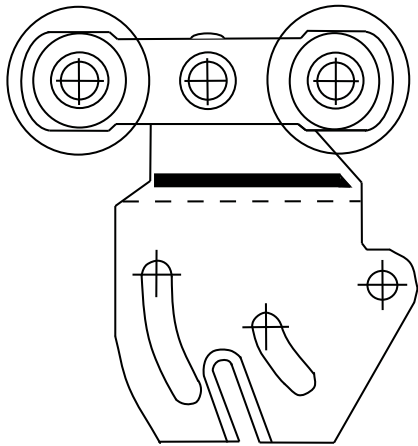



2228 HANGER

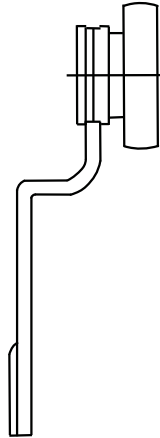




2226 HANGER





116 DOUBLE FLOOR GUIDE

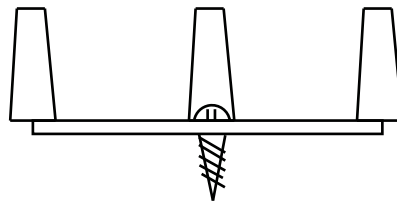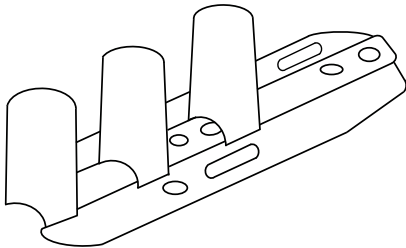


0880 DOOR STOP



FLUSH PULL



2165 TRACK STOP



TEK SCREWS